


Junction box

# WKE Rapid-Box HT 1x3 16<sup>2</sup> 1F

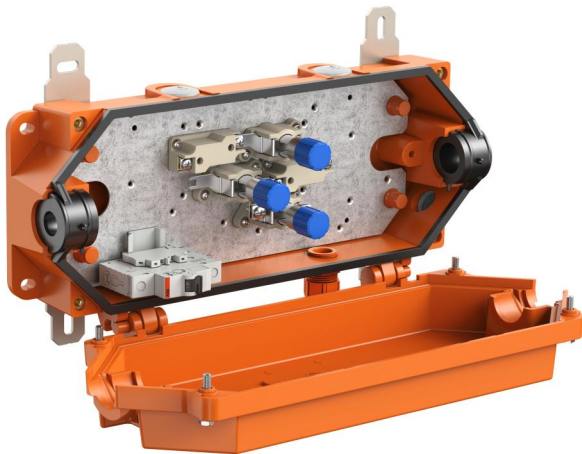

## WKE Rapid-Box HT 1x3 16<sup>2</sup> 1F

**Junction box**

Productnumber: 30232116

Dimensions: 190 x 447 x 105 mm

Junction box, protection class IP66/IP67, Ui=400 V AC, M25, (5 side), external fixing lugs, with E30 - E 90 electrical functional integrity according to DIN 4102 Part 12. For installations in the industrial environment and tunnel applications, pressure and suction tight in accordance with Gotthard guideline. Halogen-free enclosure made of special thermosetting plastic, terminals made of special high-temperature-resistant ceramic. External fixing lugs and cover screws made of stainless steel 1.4571

**orange, Feed-through: 3-pole terminal for uncut wires, clamping range for uncut wire 2.5mm<sup>2</sup> to 25mm<sup>2</sup>, clamping range for cut wire 2.5mm<sup>2</sup> to 16mm<sup>2</sup>, rated current 63A. Fuse and feedback-free junction 3-pole up to 2.5<sup>2</sup>mm, fuse protection with 1 x circuit breaker, unipolar B16, pre-wired, sealing range main cable: 17 - 22 mm (other sealing ranges on request)**

**Accessories supplied:**

**2 off M25 cable gland, sealing range 9-16mm**

**4 off M25 locking screws**



## Technical Data

### electrical characteristics

Rated operating voltage AC:	400 V
Rated insulation voltage AC:	400 V
max. wire cross section (wire branching):	2,5 mm²
Max. conductor cross section:	16 mm²
Protection class:	II
Type of protection:	IP66/IP67
Circuit integrity class:	E30/E60/E90

### Colours

Base unit colour:	orange
Cover colour:	orange

### Dimensions

Width:	190 mm
Length:	447 mm
Height:	105 mm
Inner length:	350 mm
Inner width:	145 mm
Inner height:	95 mm
Weight:	4.4 kg

### Material characteristics

Halogen free:	yes
Flammability class according with UL94:	V0
Glow-wire flammability according to EN 60695-2-11:	960 °C

### mechanical properties

Impact strength:	IK09
Cover screw torque:	6 Nm

### mechanical properties

Type of fastening:	Wall/ceiling mounting
Fastening:	external fixing lugs

### Ambient conditions

max. relative humidity 25°C:	100 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

### Sales Information

EAN:	4013902651566
Packing Unit Code:	C62
ETIM Class:	EC002600
Custom tariff number:	85369095

### Material

Base unit material:	Duroplast
Cover material:	Duroplast
Sealing material:	Silicone
Cover screw material:	Stainless steel V4A